
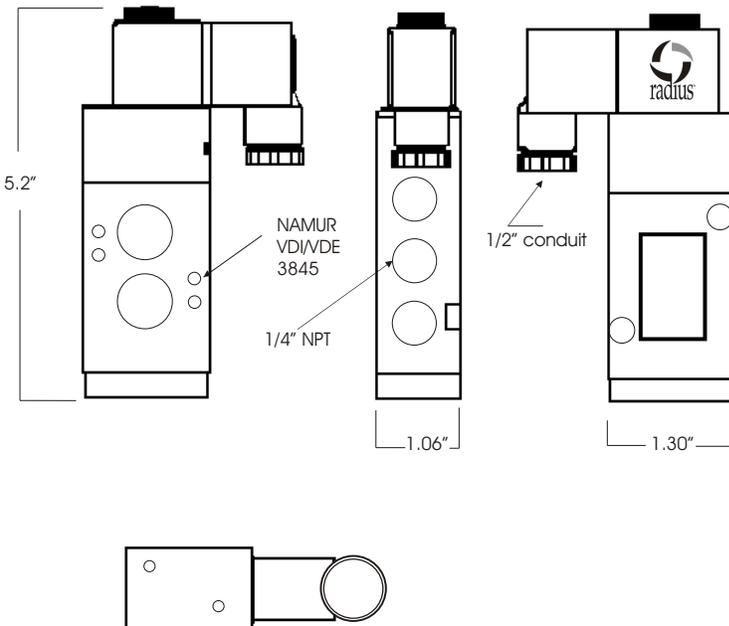


# Radius NU series solenoid valve

Product Bulletin NU-001

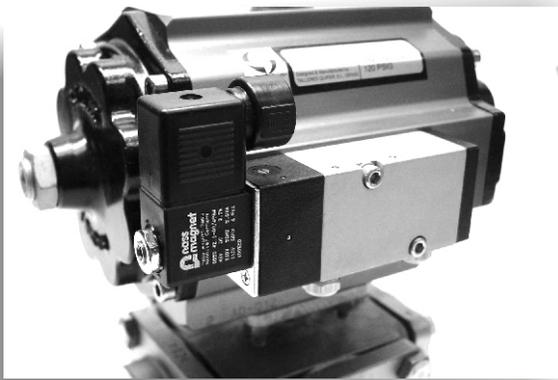

4 way 5/2 solenoid valve that directly mounts to all Radius actuators. Standard features include a manual override, safety position by mechanical spring. Pilots both spring return and double acting actuators. 1/4" npt exhaust ports for easy speed control adaptation.

**TECHNICAL DATA:**  
 Pressure range: 20-120 psi  
 Media Temperature: -40-140 degrees f  
 Body: Extruded aluminum  
 Seal: NBR  
 Part #: NU-NMRI-A1  
 IP65 Molded Coil  
 Cv 1.4

Manual over-ride standard  
 Available coil voltages:  
 DC:  
 12/ 4.6W  
 24/ 6.0W  
 48/ 2.7W  
 AC:  
 24/ 8.5VA  
 110/ 6.0 VA

**Distributed By: Top Line Process Equipment**  
 21 Valley Hunt Drive  
 Lewis Run, PA 16738  
 1-800-458-6095  
[www.toplineonline.com](http://www.toplineonline.com)