

PORTABLE HYDRAULIC POWER UNIT

MODEL HT11DXR

This diesel power unit features an extended run fuel tank, extra oil cooling and easy handling. Great for continuous duty applications powering our pumps or other hydraulic equipment.




FEATURES

- Efficient Yanmar Diesel Engine
- Electric Start
- Variable Speed
- Single Point Lifting Bracket
- Roll Cage Frame
- Large Fuel Tank
- Gear Type Hydraulic Pump
- Pressure Control Valve
- System Relief Valve
- Liquid Filled Pressure Gauge
- Spin-On 10 Micron Return Filter
- Efficient Oil Cooler
- Fluid Level Gauge
- For Flows and Pressures Other Than Standard, Consult Factory

A0899

Model HT11DXR Overall Dimensions

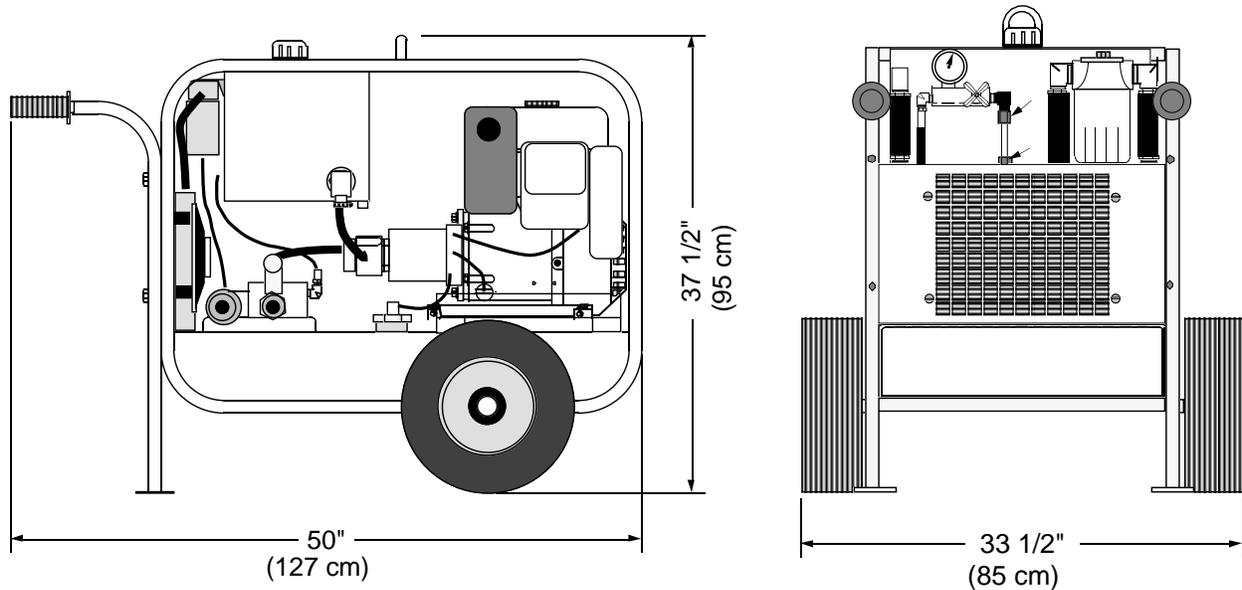

SPECIFICATIONS

ENGINE:.....Yanmar L100A Diesel
HORSE POWER:.....11 @ 3500 RPM
HYDRAULIC OUTPUT:.....Variable, Max 6 GPM (23 LPM)
OPERATING PRESSURE:.....Maximum 2100 PSI (143 Bar)
HOSE PORT SIZE:.....1/2" or 3/4" NPT
HYDRAULIC OIL:.....SAE 10W or 20W Type AW
also:.. Dexron ATF or Bio-degradeable oil (Consult Factory)
OIL FILTRATION:.....10 Micron (Standard)
OIL RESERVOIR CAPACITY:.....8 U.S. Gallons (30 Liters)
FUEL TANK CAPACITY:.....15 U.S. Gallons (57 Liters)
FUEL CONSUMPTION:.....Approx. .5 U.S. Gal/Hr (1.9 Liters/Hr)
DIMENSIONS:....H 37 1/2" (95 cm) x W 33 1/2" (85 cm) x L 50" (127 cm)
WEIGHT (Dry):.....395lbs. (179 kg)

Since we are constantly striving to improve our products, specifications are subject to change without notice.