

PORTABLE HYDRAULIC POWER UNIT

MODEL HT15DH



This power unit features a Hatz air cooled diesel engine, large oil reservoir and several lifting points for easy handling. A versatile power source for hydraulic tools, cylinder and hydraulic motor applications.

FEATURES


- Reliable Hatz Diesel Engine with Electric Start
- Roll Cage Frame
- Engine Mounted Fuel Tank
- Multi-Point Lifting Eyes
- Vane Type Hydraulic Pump
- Pressure Control Valve
- System Relief Valve
- Several Pressure and Flow Combinations Available
- Fluid Level Gauge
- Liquid Filled Pressure Gauge
- Spin-On 10 Micron Return Filter

OPTIONS:

- Optional Circuits and Valving
- For Flows and Pressures Other Than Standard, Consult Factory

B1001

Model HT15DH Overall Dimensions

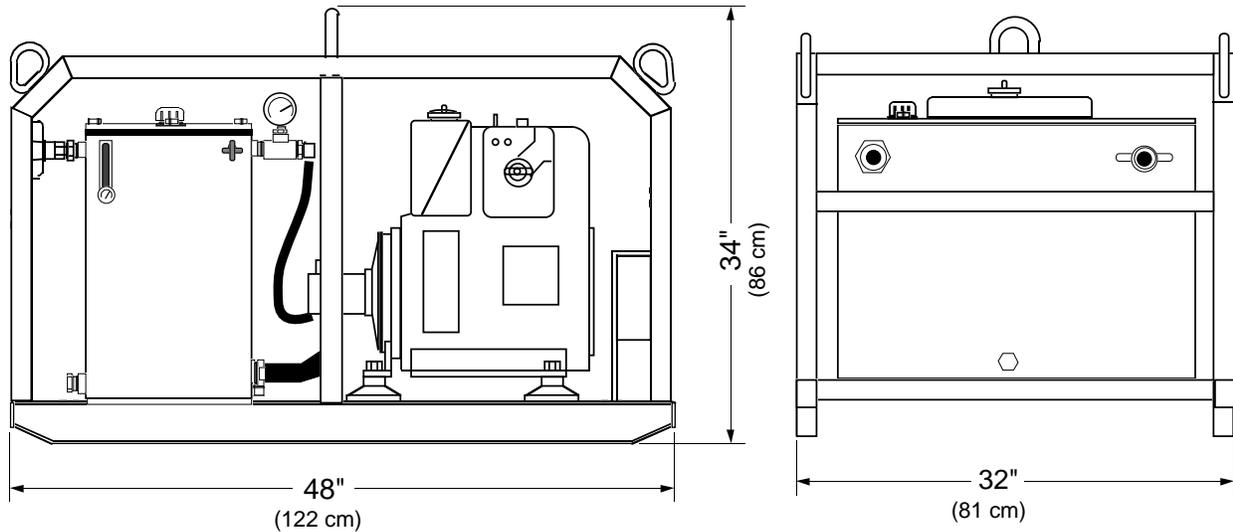

SPECIFICATIONS

ENGINE:.....Hatz 1D81Z D Air Cooled Diesel
HORSEPOWER:.....15 @ 3000 RPM
HYDRAULIC OUTPUT: (Std.).....Variable, Max. 10 GPM (38 LPM)
OPERATING PRESSURE: (Std.).....Maximum 2000 PSI (136 Bar)
HOSE PORT SIZE:..... 3/4" NPT
HYDRAULIC OIL:.....SAE 10W or 20W Type AW
also: Dexron ATF or Bio-degradeable Oil (Consult Factory)
OIL FILTRATION:.....10 Micron (Standard)
OIL RESERVOIR CAPACITY:.....25 U.S. Gallons (95 Liters)
FUEL TANK CAPACITY:.....1.8 U.S. Gallons (7 Liters)
FUEL CONSUMPTION:.....Approx. .75 Gal/Hr (2.8 Liters/Hr)
DIMENSIONS:.....H 34" (86 cm) x W 32" (81 cm) x L 48" (122 cm)
WEIGHT (Dry):.....600 lbs. (272 kg)

Since we are constantly working to improve our products, specifications are subject to change without notice.