

## **PORTABLE HYDRAULIC POWER UNIT**

**MODEL HT20G / HT20GV**

This power unit features a Honda 24 HP OHV gas engine, extended run fuel tank, extra oil cooling and easy handling. Great for continuous duty applications powering our pumps or other hydraulic tools and equipment.




## **FEATURES**

- Reliable Honda OHV Gas Engine with Electric Start and Low Oil Shut-Down
  - Roll Cage Frame with Wheel Kit
  - 15 Gallon Built-in Fuel Tank
  - Single Point Lifting Bracket
  - Gear Type Hydraulic Pump
  - Pressure Control Valve
  - System Relief Valve
  - Efficient Oil Cooler with Thermostatic Fan Control
  - Fluid Level Gauges
  - Liquid Filled Pressure Gauge
  - Spin-On 10 Micron Return Filter
- OPTIONS:**
- Optional Pressure Compensated Piston Hydraulic Pump (HT20GV model)
  - For Flows and Pressures Other Than Standard, Consult Factory

C0701

## Model HT20G/GV Overall Dimensions

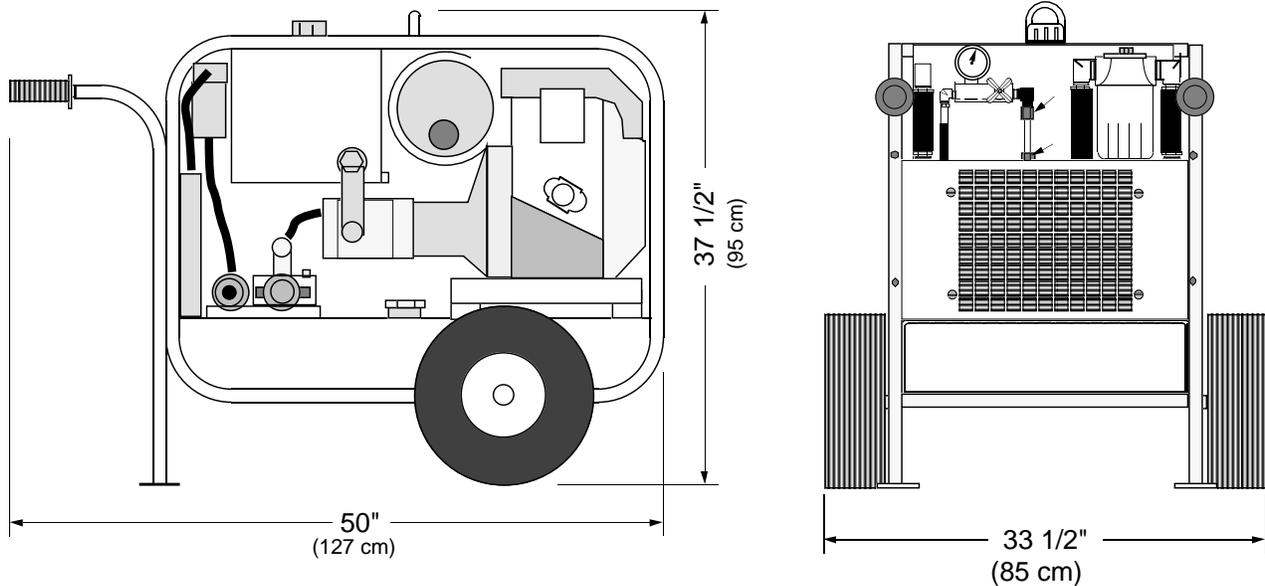

## SPECIFICATIONS

ENGINE:..... Honda GX670 Gasoline  
HORSEPOWER:..... 24 @ 3500 RPM  
HYDRAULIC OUTPUT:..... Variable, Max. 12 GPM (45 LPM)  
OPERATING PRESSURE:..... Maximum 2500 PSI (170 Bar)  
HOSE PORT SIZE:..... 3/4" NPT  
HYDRAULIC OIL:..... SAE 10W or 20W Type AW  
also: Dexron ATF or Bio-degradeable Oil (Consult Factory)  
OIL FILTRATION:..... 10 Micron (Standard)  
OIL RESERVOIR CAPACITY:..... 8 Gallons (30 Liters)  
FUEL TANK CAPACITY:..... 15 Gallons (57 Liters)  
FUEL CONSUMPTION:..... Approx. 1.5 Gal/Hr (5.7 Liters/Hr)  
DIMENSIONS:....H 37 1/2" (95 cm) x W 33 1/2" (85 cm) x L 50" (127 cm)  
WEIGHT (Dry):..... 450lbs. (204 kg)

Since we are constantly working to improve our products, specifications are subject to change without notice.