


PORTABLE HYDRAULIC POWER UNIT

MODEL HT60DCV

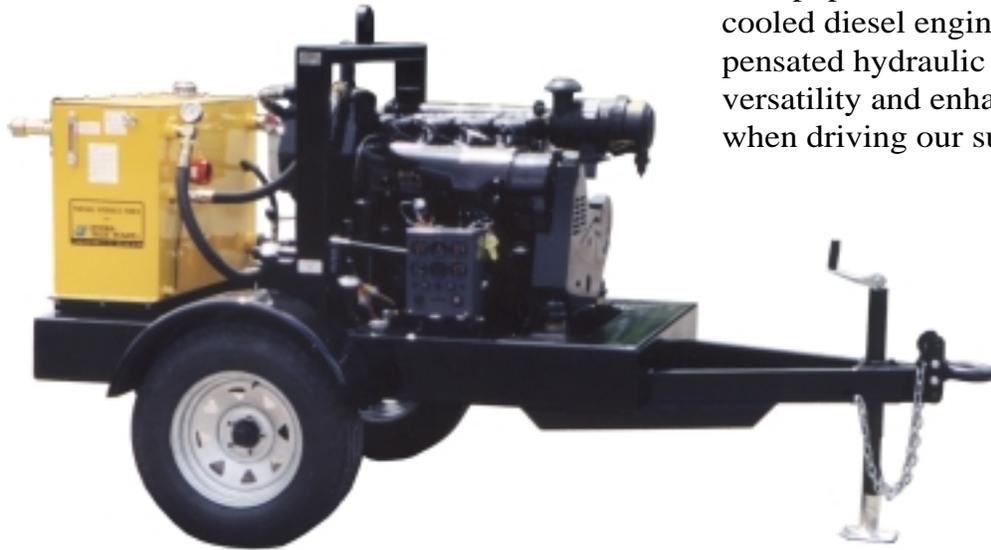

This popular unit features a Deutz air-cooled diesel engine and pressure compensated hydraulic pump for maximum versatility and enhanced performance when driving our submersible pumps.

FEATURES


- Proven Deutz Air-Cooled Diesel Engine
- Highway Trailer Chassis with Built In Fuel Tank and Independent Suspension
- Single Point Lifting Bracket and Transport Tie Down Brackets
- Automatic Engine Safety Shutdown Package
- High Efficiency Piston Hydraulic Pump
- Variable Speed Control
- Engine Mounted Hydraulic Oil Cooler
- Spin-On Return Filter with Indicator
- System Relief Valve
- Pressure Control Valve
- Fluid Level/ Temperature Gauge

OPTIONS

- Optional Skid Frame
- Multiple Hydraulic Circuits
- Other Flow and Pressure Combinations

C0301

Model HT60DCV Overall Dimensions

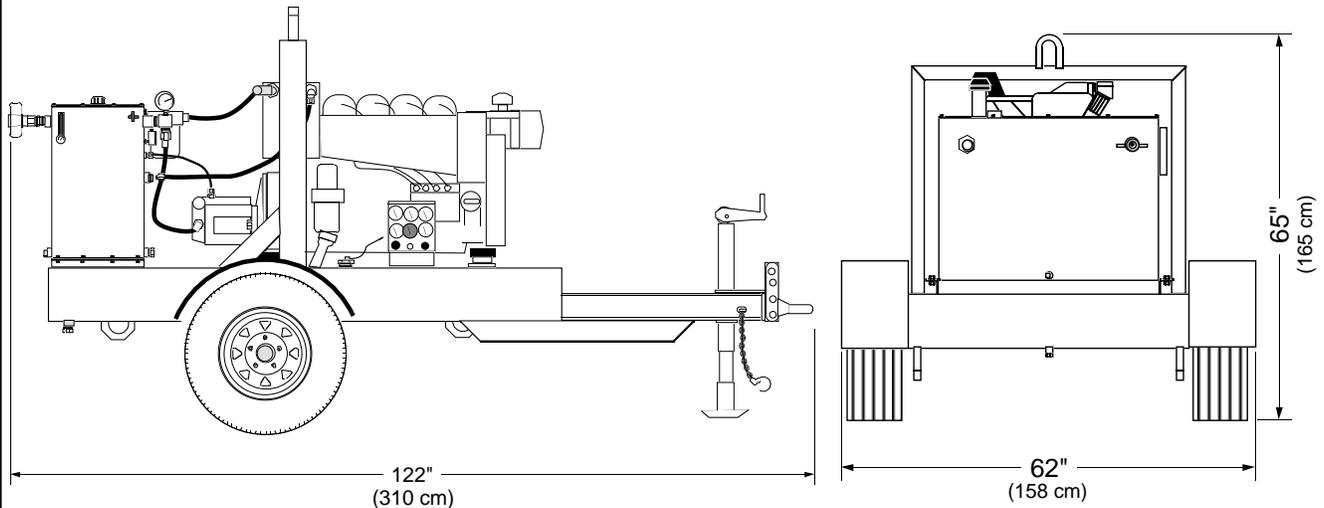

SPECIFICATIONS

ENGINE:.....Deutz F4L913 Air-Cooled Diesel
HORSEPOWER:.....70 @ 2300 RPM
HYDRAULIC OUTPUT*:.....Variable, Max. 26 GPM (98 LPM)
OPERATING PRESSURE*:.....Maximum 2900 PSI (197 Bar)
HOSE PORT SIZE:.....1" NPT
HYDRAULIC OIL:.....SAE 10W or 20W Type AW
also:Bio-degradeable oil (Consult Factory)
OIL FILTRATION:.....10 Micron (Standard)
OIL RESERVOIR CAPACITY:.....45 U.S. Gallons (170 Liters)
FUEL TANK CAPACITY:.....49 U.S. Gallons (186 Liters)
FUEL CONSUMPTION:.....Approx. 2.2 U.S. Gal/Hr (8.3 Liters/Hr)
DIMENSIONS:.....H 65" (165 cm) x W 62" (158 cm) x L 122" (310 cm)
WEIGHT (Dry):.....2240lbs. (1015 kg)

* For Flows and Pressures Other Than Standard, Consult Factory

Since we are constantly working to improve our products, specifications are subject to change without notice.



P.O. Box 537, Mt. Holly, NJ 08060, USA
Website: www.hydra-tech.com

Phone: 609-267-5393 Fax: 609-261-8070
E-Mail: htpump@hydra-tech.com