

8" HYDRAULIC SUBMERSIBLE MIXED FLOW HIGH VOLUME PUMP

MODEL S8M

8" (200 mm) Discharge

The S8M offers a cost effective solution for pumping high volumes of water at low to medium heads. This pump is great for retention ponds, flood control, marine salvage and many other jobs that require quick and easy set-up.



FEATURES

- **Small Overall Size** allows for use in Tight Spaces
- **High Volume Axial Flow Design**
- **Variable Speed Drive**
- **Oil Lubricated Seals**
- **Dependable Gear Type Hydraulic Motor**
- **Safe Hydraulic Drive Can Be Used Where Electric Power is Hazardous or Impractical**
- **Operates With Our HT20 to HT35 Power Units or Other Hydraulic Power Sources with flows of up to 18 GPM and pressures to 2800 PSI.**


SPECIFICATIONS

WEIGHT:.....	190 lbs. (86 kg)
HEIGHT:.....	31" (79 cm)
DIAMETER (@ widest point w/o flange):.....	17" (43 cm)
DISCHARGE:.....	8-5/8" O.D. Pipe or Flange
SOLIDS HANDLING:.....	1" (25 mm)
HOSE PORTS:.....	3/4" NPT
HYDRAULIC COUPLINGS:.....	3/4" Wing Nut Style
PUMP BODY:.....	Cast Iron
IMPELLER:.....	Bronze
SHAFT:.....	Stainless Steel
SHAFT SEALS:.....	Carbon/Ceramic (Std)
ELASTOMERS:.....	Buna N (Std)
HYDRAULIC OIL:.....	214-320 s.s.u. @ 100°F (64°C)
INPUT FLOW:.....	Max. 18 GPM (68 LPM)
OPERATING PRESSURE:.....	Max. 2800 PSI (190 Bar)
POWER SOURCE:.....	Any Open Center Hydraulic System


A0700

Specifications subject to change without notice.

Model S8M Overall Dimensions

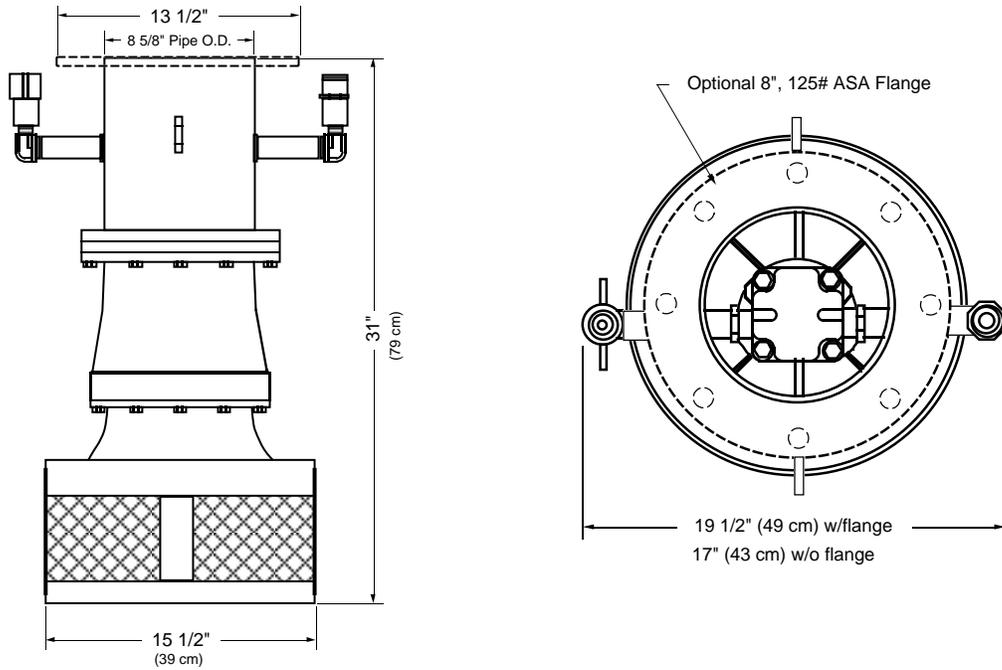

S8M Typical Performance

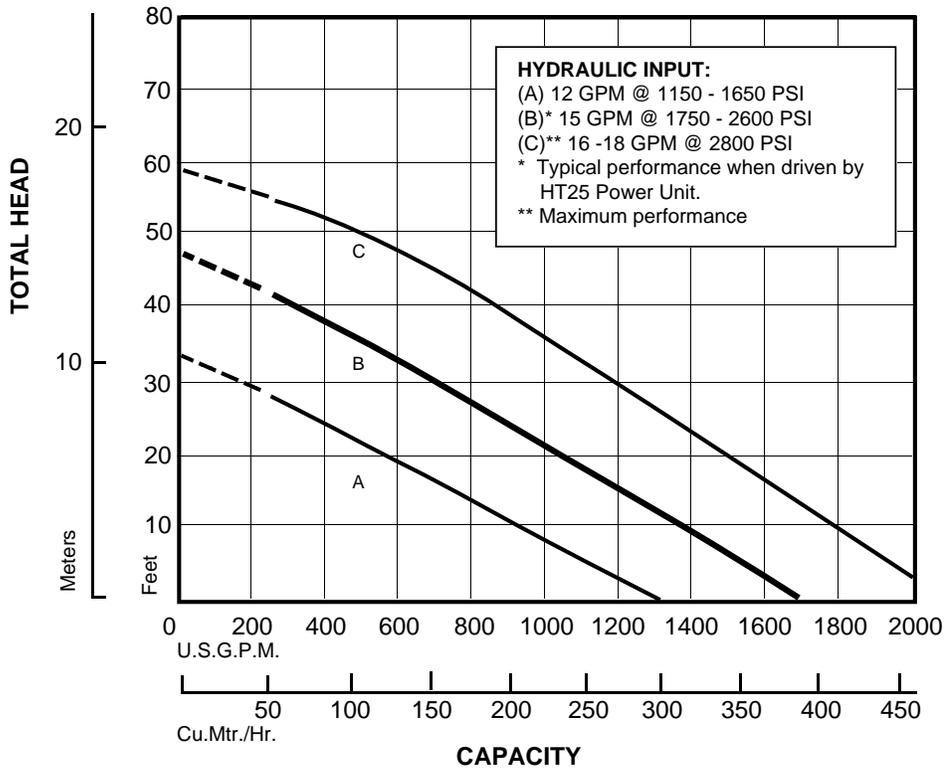

Curves are based on pumping water at 60° F. For Performance Curves other than shown above, Consult Factory.