


SludgeMaster™ Air-Driven High-Flow Pump Specifications and Performance

When your situation calls for fast dewatering, the SludgeMaster delivers. It provides our highest flow rates — up to 300 gpm — and runs on compressed

air for continuous power supply. This trash pump handles everything from mud and leaves to sand and solids without clogging.

PERFORMANCE

SM

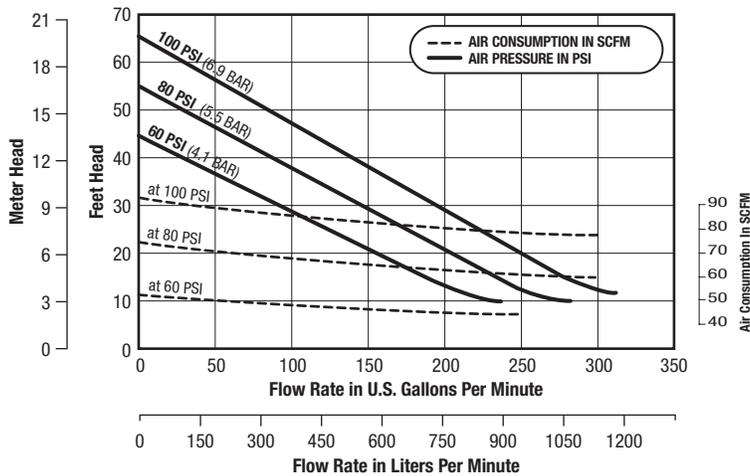

SPECIFICATIONS

SM

	English	Metric
Maximum Flow	300 gpm	1,140 lpm
Maximum Discharge Pressure	28 psi	2 bar
Max. Solid Particle Size	1.5"	6 mm
Air Inlet	.50" NPT	
Exhaust Outlet	.75" NPT	
Fluid Outlet	3" NPT (female)	
Weight	59 lbs	26.76 kg

- Fully submersible
- Weighs 59 lbs
- Won't choke on small trash
- Can run dry without damage
- Handles solids up to 1.5"
- Self-draining to prevent damage in subfreezing weather
- Fits in openings as small as 14" diameter
- Self-priming and continuous automatic lubricating
- Optional rock screen for 1/2" solids available
- Fool-proof design that handles abrasive substances with less wear
- Built for rough handling and long life on land, sea or offshore

