

TOP LINE

Sanitary Stainless Steel Full Flow Ball Valves



Stainless Steel
Flow Control
Equipment for the
Food and Beverage,
Dairy, Cosmetics,
Biotechnology,
Pharmaceutical and
Electronics Processing
Industries


TOP-FLO® SANITARY STAINLESS STEEL BALL VALVES

Top Line's Ball Valve is engineered to be the finest in the industry. Each valve is built to exacting specifications and is constructed to perform flawlessly in the most hostile environment.

Top Line's Ball Valves are utilized by firms which demand the uncompromised ability to regulate flow - from full flow open to various degrees of closure.

IMPORTANT FEATURES

- 360 Degree Installation - Valve may be installed in any position.
- Teflon cavity fillers are precision machined to maintain sanitary environment.
- Easy "In-line" servicing. Unique design allows valve ends to remain attached while servicing valve body.
- No special tools needed.
- Minimal turbulence - maximum flow through.
- USDA approved
- ISO5211 Mounting Pad

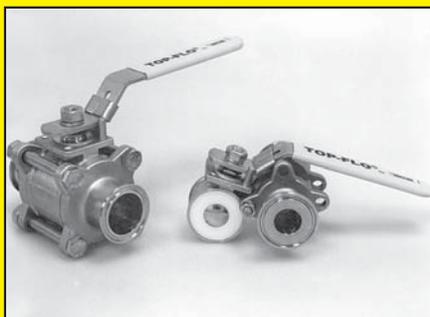


Seats and cavity fillers are easily serviced in line by removing one bolt.

MECHANICAL SPECIFICATIONS

- Sizes - 1/2", 3/4", 1", 1 1/2", 2", 2 1/2", 3" and 4"
- Materials - 316 Stainless Steel
- Teflon seating
- Connections - Clamp. Other connections available upon inquiry
- Infinite number of closure positions
- Locking handle
- Pressure - 1,000 psi at 70°F all sizes
- True port
- Air actuators available
- Double Teflon stem packing

DIMENSIONAL SPECIFICATIONS

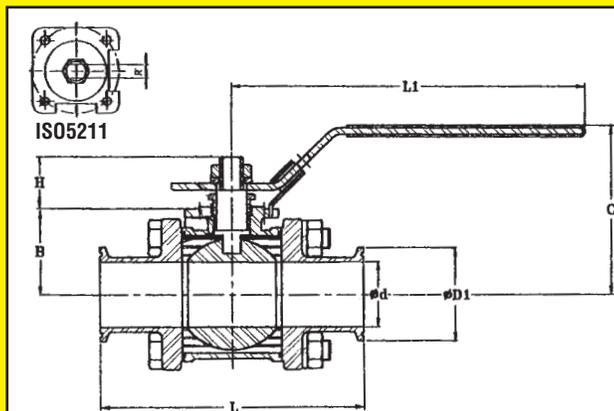

SIZE	B	C	H	d	D1	L	L1	R	ISO5211
1/2	1.16	2.05	.75	.37	.99	3.50	3.94	.20	F03
3/4	1.36	2.24	.75	.63	.99	3.98	3.94	.20	F03
1	1.38	2.36	.85	.87	1.99	4.49	5.16	.26	F04
1 1/2	1.81	3.54	1.16	1.38	1.99	5.51	7.36	.33	F05
2	2.13	4.02	1.16	1.87	2.52	6.14	7.36	.33	F05
2 1/2	2.95	5.51	1.65	2.37	3.05	7.76	10.24	.47	F07
3	3.35	6.10	1.65	2.87	3.58	9.02	10.24	.47	F07
4	4.17	7.09	2.26	3.83	4.69	9.57	11.42	.63	F11

L - Face to Face

L1 - Handle - Center to End

C - Center to Top of Handle

4" Ball Valves have 6 bolts.

CONTACT YOUR TOP LINE SALES REPRESENTATIVE FOR ASSISTANCE

Office: P.O. Box 264
Bradford, PA 16701

Plant: 21 Valley Hunt Drive
Lewis Run, PA 16738



Phone: 800-458-6095
814-362-4626

FAX: 814-362-4453

