


TOP LINE

Concentric Check Valves

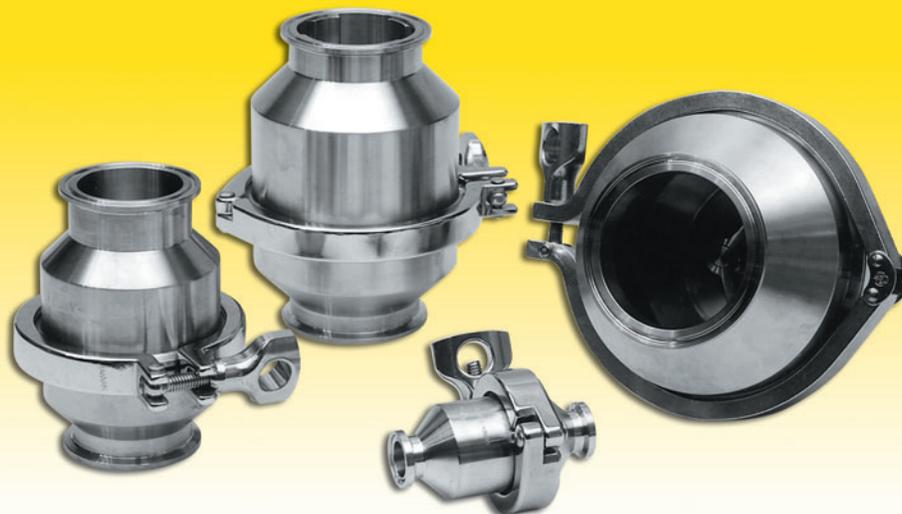

Stainless Steel

Flow Control

Equipment for the

Food and Beverage,

Dairy, Cosmetics,

Biotechnology,

Pharmaceutical and

Electronics Processing


Industries

TOP LINE CONCENTRIC CHECK VALVES

This finely crafted 316L stainless steel check valve offers maximum quality that meets all 3A standards. With a unique clamp design, a simple twist of the wing nut permits quick disassembly without tools. The stainless steel spring in this superior valve assures positive closure and smooth operation. This valve is designed for vertical as well as horizontal applications.

FEATURES

- Suitable for C.I.P.
- Operating pressure to 150 psi
- Temperature from 30°F min. to 225°F max.
- Standard end connection-clamp type (butt weld & TI-Line upon request)
- Guide finger disc available upon request.
- Standard seals-FDA Viton (EPDM & other elastomers upon request)
- Internal finish-25 to 30ra average
- Material Test Reports provided upon request

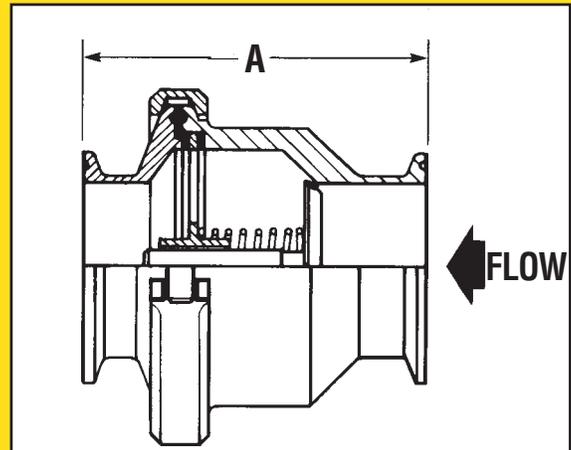

Note: Horizontal valve as shown. Remove spring to convert to vertical valve.

T45MP - STANDARD DISC TYPE CHECK VALVE (3A)

SIZE	A	STOCK NO.
1/2"	3-1/2"	384505V
3/4"	3-1/2"	384507V
1"	4-1/8"	384510V
1 1/2"	4-9/16"	384515V
2"	5-1/16"	384520V
2 1/2"	5-3/8"	384525V
3"	6-1/8"	384530V
4"	8-1/8"	384540V
6"	8-1/8"	384560V

T45MP - GUIDE FINGER DISC TYPE CHECK VALVE

SIZE	A	STOCK NO.
1/2"	3-1/2"	N/A
3/4"	3-1/2"	N/A
1"	4-1/8"	384510GFE
1 1/2"	4-9/16"	384515GFE
2"	5-1/16"	384520GFE
2 1/2"	5-3/8"	384525GFE
3"	6-1/8"	384530GFE
4"	8-1/8"	384540GFE
6"	8-1/8"	384560GFE

CONTACT YOUR TOP LINE SALES REPRESENTATIVE FOR ASSISTANCE

Office: P.O. Box 264
Bradford, PA 16701
Plant: 21 Valley Hunt Drive
Lewis Run, PA 16738



Phone: 800-458-6095
814-362-4626
FAX: 814-362-4453

