


## **PORTABLE HYDRAULIC POWER UNIT**

**MODEL HT60DJV**

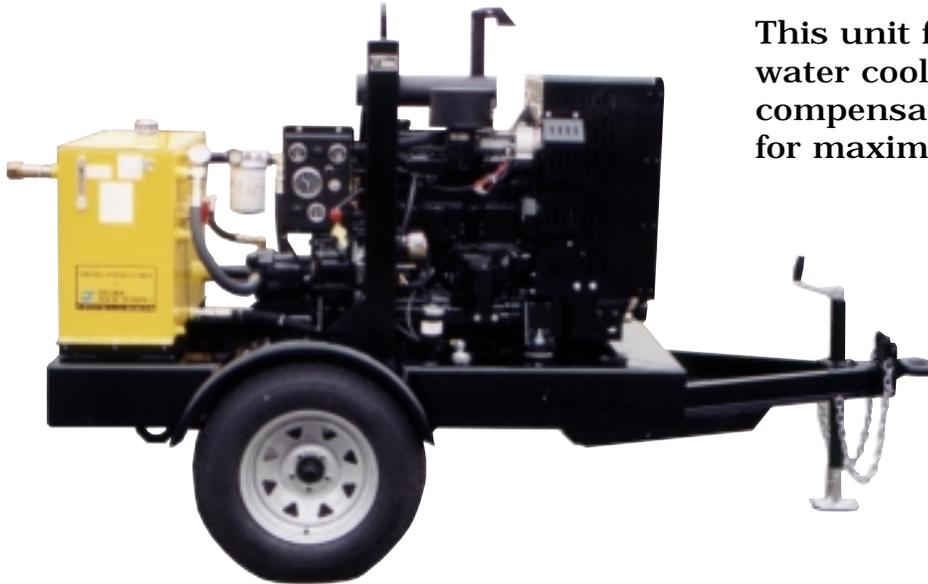

This unit features a John Deere water cooled diesel and pressure compensated hydraulic pump for maximum versatility.

### **FEATURES**


- Dependable John Deere Diesel Engine
- Highway Trailer Chassis with Built In Fuel Tank and Independent Suspension
- Single Point Lifting Bracket
- Transport Tie Down Brackets
- Automatic Engine Safety Shutdown Package
- High Efficiency Piston Hydraulic Pump
- Efficient Hydraulic Oil Cooler
- Spin-On Return Filter W/ Indicator
- Pressure Relief Valve
- Pressure Control Valve
- Fluid Level/ Temperature Gauge

### **OPTIONS**

- Optional Skid Frame
- Multiple Hydraulic Circuits
- Other Flow and Pressure Combinations

B0401

## Model HT60DJV Overall Dimensions

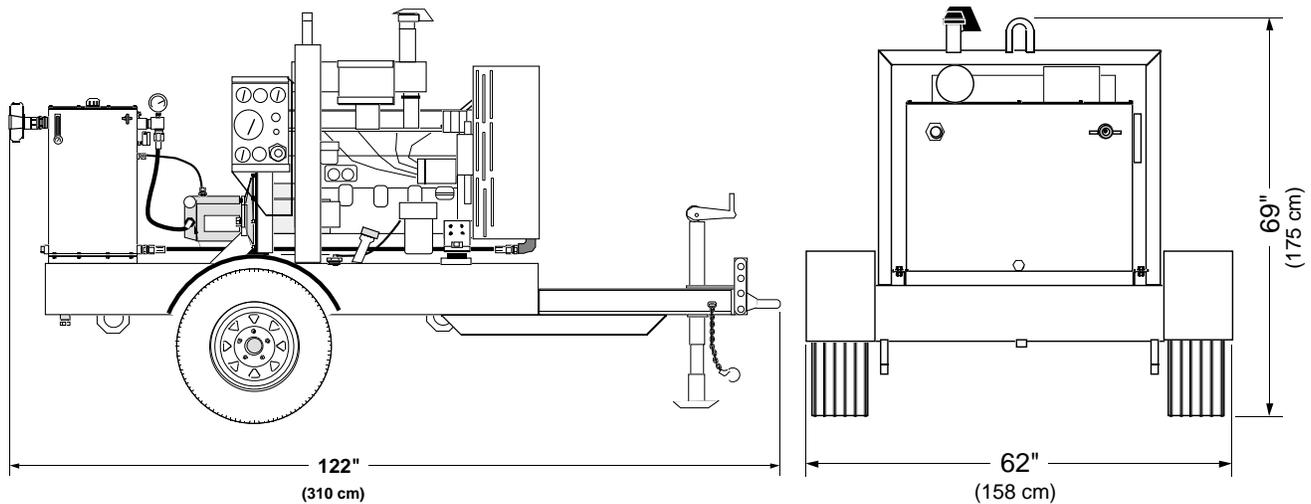

## SPECIFICATIONS

ENGINE:.....John Deere 4045D Diesel  
 HORSE POWER:.....72 @ 2300 RPM  
 HYDRAULIC OUTPUT\*:.....Variable Max 26 GPM (98 LPM)  
 OPERATING PRESSURE\*:.....Maximum 2900 PSI (197 Bar)  
 HOSE PORT SIZE:.....1" NPT  
 HYDRAULIC OIL:.....SAE 10W or 20W Type AW  
                   also: .....Bio-degradeable oil (Consult Factory)  
 OIL FILTRATION:.....10 Micron (Standard)  
 OIL RESERVOIR CAPACITY:.....45 U.S. Gallons (170 Liters)  
 FUEL TANK CAPACITY:.....49 U.S. Gallons (186 Liters)  
 FUEL CONSUMPTION:.....Approx. 2.8 U.S. Gal/Hr (10.6 Liters/Hr)  
 DIMENSIONS:.....H 69" (175 cm) x W 62" (158 cm) x L 122" (310 cm)  
 WEIGHT (Dry):.....2460lbs. (1114 kg)

\* For Flows and Pressures Other Than Standard, Consult Factory

Since we are constantly working to improve our products, specifications are subject to change without notice.



P.O. Box 537, Mt. Holly, NJ 08060, USA  
 Website: [www.hydra-tech.com](http://www.hydra-tech.com)

Phone: 609-267-5393 Fax: 609-261-8070  
 E-Mail: [htpump@hydra-tech.com](mailto:htpump@hydra-tech.com)